

COWPER AND TORDOFF LIMITED *(fabric sales)*

RIVERSIDE WORKS, COLNE ROAD, HUDDERSFIELD. HD1 3AY TEL 01484425300 FAX 01484425775 email www.furfab.com

FABRIC DATA SHEET

DATE OF ISSUE:- 21-02-2014
AMMENDMENT NO:- 02


QUALITY

FELT

THICKNESS 2mm
WIDTH (USEABLE) 152cm
WEIGHT PER LINEAR METRE (\pm 8%) 300g
(INCLUDING SELVEDGES)
WEIGHT PER SQUARE METRE (\pm 8%) 200g

COMPOSITION 100% ACRYLIC

SUGGESTED CARE LABELLING

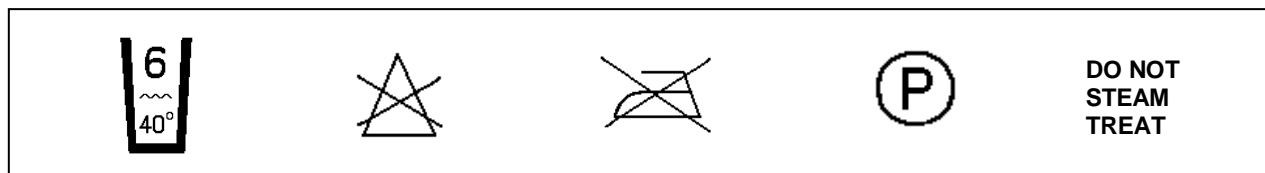

SHRINKAGE

WASH & FLATLAY DRY		\pm 5.0%
WASH & TUMBLE DRY	H.L.C.C. 6	\pm 5.0%
DRY CLEAN (NO STEAM)	BS 4961 PART 1 1980	\pm 5.0%

COLOUR FASTNESS

(COLOUR FASTNESS MAY VARY SLIGHTLY ACCORDING TO SHADE)

1. LIGHT	4-5	TESTED IN ACCORDANCE WITH BS EN ISO 105 - B04: 1997
2. WATER	4	(STAINING TO MULTI FIBRE STRIP SDC – DW) TESTED IN ACCORDANCE WITH BS EN ISO 105 – E01: 1996
3. PERSPIRATION	4	(STAINING TO MULTI FIBRE STRIP SDC – DW) TESTED IN ACCORDANCE WITH BS EN ISO 105 – E04: 1996
4. RUBBING: WET & DRY	4	TESTED IN ACCORDANCE WITH BS EN ISO 105 – X12: 1995
5. WASHING	4	TESTED IN ACCORDANCE WITH TEST METHOD C4A @ 40°C.

OUR AIM IS TO MEET THE ABOVE INTERNATIONAL COLOUR FASTNESS STANDARDS.

However, certain colours e.g. heavy shades of red, black or navy, which have been requested from us, do not meet these standards. It is therefore essential that our customers satisfy themselves that the colour and fabric combinations are acceptable to their own standards.

FLAMMABILITY

B.S.5665: PART 2 1989 EN71: PART2 2011-5.4 EN71-3:1995+A1+AC1

CHEMICAL RISK MANAGEMENT

EN71 Part 3 2013